

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 August 2002 (22.08.2002)

PCT

(10) International Publication Number
WO 02/064898 A1

(51) International Patent Classification⁷: **E03D 9/03**

(21) International Application Number: PCT/GB02/00599

(22) International Filing Date: 11 February 2002 (11.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0103283.8 9 February 2001 (09.02.2001) GB

(71) Applicant (for all designated States except US): **JEYES GROUP LIMITED** [GB/GB]; Brunel Way, Thetford, Norfolk IP24 1HF (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILSON, Brian** [GB/GB]; Torridon, 52 Common Road, Bressingham,


Diss, Norfolk IP22 2BB (GB). **BALLS, Steve** [GB/GB]; 42 Thistle Close, Thetford, Norfolk IP24 2YB (GB). **PLEASANCE, Paul** [GB/GB]; 9 Mill Close, Walsham-Le-Willows, Burry St. Edmunds, Suffolk IP31 3BW (GB). **SOBIECHOWSKI, Rachel** [GB/GB]; 40 Malsters Close, Mundford, Thetford, Norfolk IP24 5HJ (GB).

(74) Agent: **LUCKHURST, Anthony, Henry, William;** Marks & Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: LAVATORY CLEANSING DEVICES

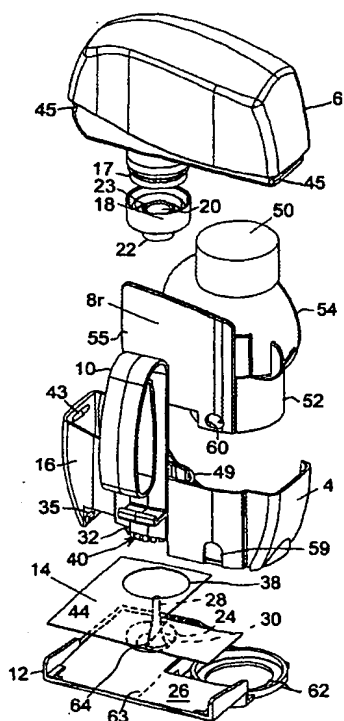

(57) Abstract: A liquid dispensing unit for a toilet bowl comprises a first container (6) containing a first, liquid formulation, a second container (8) containing a second formulation, which may be a solid tablet (50). The liquid from container (6) flows onto a delivery surface (14) from where it is washed into the toilet bowl by the flush water. Some flush water also washes over the second formulation to take components into solution and deliver them into the toilet bowl through aperture (56). The constituents of the two formulations are thus kept substantially separate until they enter the toilet bowl. The second formulation may also be a liquid.

WO 02/064898 A1



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Lavatory Cleansing Devices

This invention relates to lavatory cleansing devices for delivering fragrance and cleansing products to a lavatory bowl. The invention is particularly concerned with devices delivering a liquid product such as a perfume, surfactant or disinfectant, particularly in the form of a solution, dispersion or suspension, together with a bleach, or other relatively aggressive product such as a limescale remover, and for delivering it to a toilet bowl under the action of water used to flush the toilet bowl.

It has been known for a long time to provide so-called toilet automatics in the form of a solid or semi-solid product, a 'rim block', to be mounted within the inner rim of a water closet bowl where the flushing water will wash over the product and so dissolve or erode it to release active constituents into the water flow. Blocks may also be placed on top of the cistern in Japanese style systems where water from a tap flows over the block and then into the cistern, and also may be placed within the cistern below the water level, where they slowly release constituents into the water.

These products have long been used to deliver a surfactant, a perfume and a dye to the toilet bowl. The surfactant provides a cleaning action, whilst the dye and perfume provide a visual and olfactory indication to the user that some cleansing effect is being achieved. Much effort has also been put into formulating rim blocks which will also deliver a bleaching agent, such as sodium dichloroisocyanurate, to the toilet bowl and these have been successfully developed and marketed by the present applicants.

Different considerations apply when formulating products which dose the water in the cistern and products which dose directly into the toilet bowl. With a solid block, the block will be completely immersed in water when used in

the cistern, but will be exposed only intermittently to flush water when used in the toilet bowl.

Many different mechanisms have been proposed for dosing solid or liquid formulations into the cistern, making use of movement of water in the cistern. For dosing directly into the toilet bowl, the long used system has been a solid block which is housed in a cage suspended in the path of the flush water as it enters the bowl.

More recently, products have been developed for dosing a liquid toilet freshening product directly into the toilet bowl, in a similar manner to rim blocks, providing a so-called liquid rim product. For example, EP-A-0 538 957 describes a device that can be mounted on the inner rim of a water closet bowl to dose a liquid freshening product into the flushing water. In this device, the liquid product is dosed into the water flow from a porous substrate, forming a delivery plate which is disposed in the path of the flushing water. The porous substrate is supplied with the liquid product from a container disposed above the substrate, a mouth at the bottom of the container has a liquid permeable plug which opens onto the upper surface of the substrate.

EP-A-0 785 315 describes a development of the device discussed above. The same basic principle of delivering a liquid product into a flow of water from a porous substrate is employed. However, liquid product from the container is deposited onto the upper surface of the substrate via a regulating channel. The liquid is metered into the channel through an orifice and a separate opening allowing air into the interior of the container is provided. The sizes of the metering orifice and the air opening are related to the viscosity of the liquid being dosed.

WO 99/66139 and WO 99/66140 describe numerous variations of the liquid rim product, including different styles of delivery plate in place of the

porous plate of EP-A-0 538 957, while WO 00/42261 describes a design which uses a grooved plate.

All of the above systems use the same basic idea of delivering liquid directly from the container's mouth onto the delivery plate.

Further developments of the liquid rim system are described in co-pending applications Nos. GB 0026832.6 and WO 01/32995 which are incorporated herein by reference.

EP-A-775 741 describes a liquid formulation suitable for use in liquid rim products. This formulation comprises perfume, anionic or non-ionic surfactant, evaporation regulator and a solvent. EP-A-775 741 also mentions that a bleaching or disinfecting agent, such as hypochlorite, peroxide or isocyanurate can be incorporated in the liquid formulation but no actual formulation is described.

A problem with bleach formulations, whether of the liquid or solid type, is that the bleach can have an adverse effect on other constituents in the formulation and on the delivery device itself, particularly where it is desirable to use a transparent container so that the user can see the colour of the formulation, and can also see when the supply is nearly exhausted and a refill is required. For example, good quality perfumes are not compatible with bleaches. Typically, PVC and PET are used for moulding liquid rim devices, but high density polyethylene or polypropylene would be preferred materials for a bleach system.

We overcome the above problems by providing a liquid rim product in which separate sources of agents which are generally incompatible, such as a bleaching agent or limescale remover on the one hand and a surfactant, dye and/or perfume on the other hand, are provided. This has the benefit of not only simplifying the formulation of the sources themselves, but also giving greater flexibility in the manufacture of the delivery device.

It has been suggested to separate incompatible constituents when utilising solid or liquid compositions, such as described in US-A-3,504,384, US-A-4 200 606 and USA-4 248 827 which are dosed into the toilet cistern, but no successful commercial application of this idea has been achieved. We believe has been no suggestion of using separate sources of material when dispensing a liquid formulation at the rim of the toilet bowl, or incorporating solid and liquid formulations in a rim dispensing device.

One aspect of the present invention provides a lavatory cleansing device for use in a toilet bowl comprising a first container containing a first, liquid formulation and a second container containing a second formulation, and delivering means for automatically delivering the formulations under the action of flush water.

Preferably, the delivery means comprises a delivery surface, the first formulation being delivered onto the delivery surface, and flush water of the toilet runs over the delivery surface to carry the first formulation into the water in the toilet bowl. Very preferably the first and second formulations are kept substantially separate by the delivery means and so do not come into contact until they have mixed with the flush water. In particular it is desired that the formulations do not come into substantial contact at the lavatory cleansing device in between flushes of the toilet bowl.

In another form, a wick may extend into a container containing the or a liquid formulation and the liquid formulation is drawn from the container by flush water running over the wick. DE-A-3 419 169 describes such devices.

As noted above, the second formulation may be an acidic formulation. Such formulations are intended, in particular, to reduce limescale formation and build up in the toilet bowl.

It has been found that a delivery system using a textile surface can provide for a faster and better spread of a viscous liquid over a dosing area, as

compared to a porous substrate or grooved plate of the prior art. Without wishing to be bound by theory, it is believed that the relatively fine surface structure of the textile surface may contribute to the improved spreading characteristics.

The better spread of the viscous liquid counters its greater resistance to dissolution and dispersal in the flushing water, as compared to the more easily dispersed low viscosity liquids.

Very preferably the viscous liquid is not absorbed, or not absorbed substantially into the textile and so it is washed off more readily by flushing water in a toilet bowl, or evaporates more readily to atmosphere to provide improved fragrance. A hydrophobic textile is preferred.

Textile material is a material or fabric made from fibres, yarns or filaments (herein referred to generally as fibres). The material may be non-woven, in which fibres are bonded, fused or interlocked, but a material made by interweaving, intertwining or interlooping (referred to generally herein as weaving or knitting) is preferred.

The material may be of quite dense structure when seen in plan, so as to present a substantially continuous surface, with few if any voids between adjacent fibres. Although an open weave structure has also been found to work well. By virtue of the weaving or knitting process, the textile will have a textured or three dimensional surface.

The surface of the material may be compacted, that is with few fibres or fibrous elements projecting from the surface, and the surface texture having a low profile or height.

One textile material which may be used is a polyester knitted fabric such as used for net curtain material or heavier use such as filter material.

Some degree of trial and experimentation may be required to match the textile material and weave to the viscosity and surface tension of the liquid, and the physical design parameters of the delivery device.

A liquid component can be delivered from a container directly onto the delivery surface or the upper surface of the fabric from above, for example using devices of the type seen in EP-A- 538 957, WO 99/66139 and WO 00/42261. However it is particularly preferred to deliver the liquid from a cup located below the delivery surface or fabric. A capillary system then delivers the liquid up on to the delivery surface or fabric surface. The capillary may be a series of grooves or channels, a porous member, or a wick of cellulose, polyester or the like as used in air fresheners, for example. A system for delivering liquid onto the upper surface of a delivery plate is described in co-pending application No. WO 01/32995. Such a system is suitable for use with the fabric or textile surface, which is described in more detail in co-pending application No GB 0026832.6.

The second formulation, preferably a bleach or acid formulation, may be a liquid also, and may be delivered using a mechanism similar to those described above. However, it is particularly preferred that the second formulation is a solid and is housed adjacent the container for the non-bleach containing formulation. The solid formulation may be a single block or tablet or several tablets, pellets, granules, etc. The second formulation may also be a paste or gel.

Preferably, the tablet(s), pellets, granules etc. are housed in a substantially enclosed space which has openings to allow flushing water to enter the space and wash out some of the components into the lavatory cistern, but will inhibit access by the user in normal use. Pellets or granules may conveniently be held in a mesh bag.

More preferably, flush water is held in contact with the solid formulation for a short period of time before passing into the toilet bowl. This ensures sufficient time to dissolve constituents of the formulation, and also that

the solution is delivered at the end of the flushing cycle and so is not immediately carried out of the toilet bowl by the flushing water.

The solid formulation may contain a dye or colourant. Although a colourant may be used in a liquid formulation, to give an intense colour in the toilet bowl a high concentration is required. This may lead to unsightly staining when delivering from a liquid product. By providing a solid colourant containing component, release of the dye is better controlled. The blocks may contain dye, surfactant and a filler, similar in composition to the well known 'BLOO' (trade mark) blocks.

By providing separate formulations it is possible to provide a delivery mechanism which is better tailored to the properties of the different components of the formulations. This is particularly important with bleaching agents because these agents can cause problems if they are not handled properly. Care must be taken when formulating bleaching compositions to avoid instability during manufacture or on shelf, whilst the delivery mechanism should ensure minimum risk of contact with the user and avoid any noticeable degradation of the product, such as discolouring of any dye component during use.

Thus, for example, we can provide a solid bleach formulation which will have a long shelf life and can, in use, deliver bleach over the requisite period, typically 3 weeks or more.

By realising that the bleach component can and should be delivered separately to the other cleansing or freshening components in a liquid rim device, we are able to obtain substantial improvements in the manufacture, storage and in-use delivery of these components.

It is possible to provide a solid formulation which can have limited contact by the user and so the enclosure may have a removable cover, for example, to allow refill by a user.

It will be appreciated that liquid refills are readily provided for, the liquid and container being replaced as a single unit.

It is particularly preferred that the refill comprises the combination of the liquid container and the solid cage provided as a single unit.

Aspects of the invention are set forth in the accompanying claims.

The invention will be further described by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a front perspective view of a lavatory cleansing device forming a first embodiment of the invention;

Figure 2 is a rear perspective view of the device of Figure 1;

Figure 3 is a side view of the device of Figure 1;

Figure 4 is a cross-section along the line A-A of Figure 3;

Figure 5 is an enlarged detail of Figure 5, on circle B;

Figure 6 is an exploded view of the device of Figure 1;

Figure 7 is a perspective view on line C-C of Figure 4;

Figure 8 is a perspective view of a refill for the device of Figure 1;

Figure 9 is a perspective view of a second embodiment of the invention, in which two liquid compositions are dispensed;

Figure 10 is a plan view of the delivery plate of Figure 9;

Figure 11 is a rear perspective view of a third embodiment of the invention;

Figure 12 is a front view partly cut away of the embodiment of Figure 11;

Figure 13 is a side view of an embodiment of a modified tablet holder for the embodiment of Figures 1 to 8;

Figure 14 is a perspective view from above of the holder of Figure 13, and

Figure 15 is a plan view of the tablet holder of Figure 13.

Figure 16 is a side view corresponding to Figure 3 and showing a sloping delivery plate and the device mounted on a rim of a toilet bowl..

In the embodiment of Figures 1 to 8, a lavatory cleansing device 2 comprises a main support member 4 which carries a container 6 containing a liquid formulation 5 (see Figure 5) and a cage 8 which houses a solid formulation. Container 6 and cage 8 are clipped together and are removable from the main support member 4. The combination of container 6 and cage 8 form a refill, as seen in Figure 8.

Support member 4 has a folded strap 10 on its rear wall 16. Strap 10 is unfolded and hooked over the rim of a toilet bowl, as is well known in the art. Strap portion 10a will bear against the inner wall of the toilet rim (see Figure 16).

As more clearly seen in Figures 2 and 6, a delivery plate 12, having a textile layer 14 on its upper surface, is attached to the underside of the support member 4 and extends to the rear of the rear wall 16. In use, plate 12 will extend underneath the rim of the toilet bowl so that flush water will splash over the textile layer 14.

Plate 12 may be configured to abut the side wall of the toilet bowl to ensure collection of sufficient water in the toilet bowls, particularly US style bowls, in which the flush water is directed to flow down the wall rather than cascade turbulently from the rim.

As will be described more fully hereinafter, the lavatory cleansing device 2 incorporates, in effect, two delivery systems, a first for delivering a liquid product and a second for delivering components from a solid product, whilst keeping the products separate and allowing for a single refill unit.

The liquid delivery system will be described first. Container 6 is typically moulded of clear or semi-transparent PET or PVC. High density polyethylene or polypropylene may be used if the container contains, or is contacted by a bleach component, for example. Container 6 has an outlet

opening 17 closed by a cap 18 which has a frangible seal 20 and a tubular collar 22 extending down below the seal 20. Prior to fracture, seal 20 extends across the inner end 23 of collar 22.

Delivery plate 12 moulded of polypropylene has a cup 24 which depends downwardly from a main supporting surface 26. A spigot 28 projects up from the bottom wall 30 of the cup 24.

The layer 14 of the textile material lays on the supporting surface 26. Textile material layer 14 may be glued or welded to surface 26, for example by ultrasonic welding or held flat by spikes projecting up from surface 26, for example.

Textile layer 14 has an aperture 38 which coincides with the mouth of cup 24. Textile layer 14 need not fully surround cup 24. The requirement is to deliver liquid from the cup to the exposed area of the plate 26 and textile layer 14.

Main support member 4 has a capillary member 32 integrally formed on a bottom wall 36 of support member 4. Capillary member 32 extends through aperture 38 of textile layer 14, into the cup 24. Capillary member 32 is cylindrical, and has capillary channels 40 formed in its outer wall, facing the inner wall 42 of cup 24. Capillary channels 40 extend up to the underside of bottom wall 36, and along a thickened region of wall 36, forming an L-shape which will overlap the textile layer 14. Capillary channels 40 are positioned to deliver liquid onto the textile layer 14.

Delivery plate 12, with textile layer 14 in position, is clipped to support member 4, for example by nibs 35 integrally formed on the walls of support member 4, which clip under delivery plate 12.

In use, the container 6 is pushed into support member 4, spigot 28 displacing the frangible seal 20 of cap 18. A ledge 39 formed in the wall of container 6 rests on the upper edge 41 of support 4. Ribs 43 on the inside surface of support 4 engages in recesses 45 in the container wall. Liquid 5 will flow

from the container 6 into cup 24, through collar 22. Liquid from cup 24 is ducted up onto the upper surface 44 of textile layer 14 by the capillary channels 40. Capillary channels 40 co-operate with the inner wall 42 of cup 24 to duct the liquid upwards, until it passes into the upper leg 46 of capillary channels 40, which extend over the fabric upper surface 44.

The liquid is then ducted away from the capillary channels 40 by the texture of the textile, to spread slowly over the surface 44. It is preferred that there is no substantial absorption into the textile layer, thus a hydrophobic treatment may be preferred. One example of a textile layer is knitted on a Karl Meyer Raschel Jacquard = RMJG 5 FNE Machine, Warp (Pillar) 150/36 Semi Dull Polyester (Flat) Back Bar (Top Creel) 1/167 Textured Polyester, Front Bar (Bottom Creel) 2/167 Textured polyester. The presently preferred material is a Jacquard knitted polyester of open weave, having

| Motions | A | B |
|-----------|-----|------|
| Front Bar | Cut | Cut |
| Back Bar | Cut | Miss |

With a quality of 25.4 C.P.I.

Another fabric type is:

| Motions | A | B |
|-----------|------|------|
| Front Bar | Miss | Cut |
| Back Bar | Cut | Miss |

With a quality of 25.4 C.P.I.

This arrangement is particularly suited for use with viscous liquids. For less viscous liquids, the textile layer 14 may be dispensed with, and the upper surface 26 of plate 12 may be textured, for example with radial grooves, to duct liquid over the surface. Initially, the liquid from container 6 will fill the cup 24 only to just above the lower edge 47 of the collar 22. As the liquid is ducted out

of the cup 24 by the capillary channels 40, the level of liquid in cup 24 falls below the edge 46, allowing air to enter container 6, and so allowing more liquid to flow from the container into cup 24 until edge 46 is covered again.

Container cap 18 fits in a cylinder 49 extending up from the wall 36. Grooves 51 are provided on the inside of the wall of cylinder 49 to allow air to enter cup 24. Wall 36 sits just clear of textile layer 14 to allow liquid 5 to flow out over the surface of the textile. It has been found that the spacing of the wall 36 from the supporting surface 26, and hence the degree of compression, if any, of the textile 14 affects the rate of delivery of the product from the well or cup 24. Hence some trial is required to optimise the spacing to suit the particular textile, liquid viscosity, etc.

When the device is installed in a toilet bowl, flush water will flow over upper surface 44 of textile layer 14, washing the liquid from the textile surface.

Preferably, the liquid viscosity, capillary channel size, fabric surface, etc. are tailored to replenish the surface 44 with a fresh dosage of liquid within 30 seconds to 10 minutes after the toilet bowl has been flushed.

The above liquid delivery arrangement is described in more detail in co-pending applications Nos. WO 01/32995 and GB 0026832.6, the contents of which are incorporated herein by reference.

The other component of the cleaning device 2 is a solid tablet 50 of bleaching agent. Tabletted bleaching agents are well known.

Tablet 50 is held in cage 8 which fits in support member 4, under container 6. Cage 8 is moulded of polypropylene and forms a cylindrical cup 52 in which tablet 14 sits. Front and rear walls 54, 55 extend up from the cup 52 to embrace the container 6.

Cage 8 is configured to receive a small amount of flush water which percolates around tablet 50 to dissolve the bleach component and then drips into

the toilet bowl. It is desirable to separate the bleach component from the liquid component of container 6 until they mix in the toilet bowl. Thus, flush water exits cage 8 at an aperture 56 in the bottom wall 58 of cup 52 as seen most clearly in Figure 7.

Referring to Figure 7, an aperture 59 is formed in the rear wall 16 of support member 4, level with the textile layer 14 on the delivery plate 12. A corresponding aperture 60 in cylindrical cup 52 is aligned with aperture 59. Flush water flowing onto the textile layer 14 will splash through apertures 59, 60 and on to tablet 50. The water will then flow down and out through aperture 56. Tablet 50 is supported on ribs 61, to support the tablet over the conical bottom wall 58 of cup 52. Bottom wall 58 is aligned with an aperture 62 in delivery plate 12.

The textile layer 14 is fixed to delivery plate 12, which is then snapped in place on the underside of the supporting member 4. The cage 8 with a bleach tablet 50 in place is snapped onto the container 6, which is filled with liquid surfactant mixture and closed by cap 18. At the point of use, the consumer pushes the container/cage unit into the supporting member 4. Spigot 28 displaces seal 20, so that liquid fills cup 24 and is ducted onto the surface 44 of textile layer 14 as described above. The unit is suspended at the rim of a toilet bowl, plate 12 extending into the flow of flush water.

When the toilet is flushed, the flush water rapidly washes liquid 5 from the surface of the textile layer 14. Water will also pass through apertures 59, 60 to flow over bleach tablet 50 and wash bleach components out through aperture 56. Although the flush water may carry some of the surfactant formulation 5 over the bleach tablet 50, this will be washed out through aperture 56 and so there will not be prolonged contact in cup 52. In any event, any discoloration at tablet 50, for example, would not be visible to the user.

Plate 12 may be partitioned at line 63 of Figure 6, or the fabric layer stopped short of the apertures 59 for example at line 64 of Figure 6.

As mentioned above, tablet 50 may be in the form of a paste or gel, granules, etc. If desired, the tablet 50 may also be replaceable separately to the container 6.

As indicated above, it is desirable to provide a liquid formulation in container 6 comprising surfactant, perfume, dye and optionally a disinfecting agent. EP-A-775 741 describes such formulations.

A preferred formulation is

| | % by Weight |
|------------------------------|-------------|
| Anionic Surfactant | 26.5 |
| Nonionic Surfactant | 5.0 |
| Solvents | 10.0 |
| Antioxidant | 0.004 |
| Perfume | 10.0 |
| Dye | 0.0024 |
| Preservative | 0.1 |
| Natrosol Cellulose Thickener | 0.4* |
| Water | Balance |

The amount of natrosol is varied to achieve the desired viscosity, which typically is in the range 350 to 5000 centipoise, preferably 2000 to 4000, measured in a Broomfield LV viscosimeter, 20°C, spindle 2, speed 6.

Bleach tablet formulations are also well known in the art, and a typical formulation would include Sodium dichloroisocyanurate or trichlorocyanuric acid. The latter is available from Arch Chemicals Ltd. Under the trade mark Fi-Tabs.

As indicated above, a solid tablet of an acidic material for limescale removal or inhibition may be utilised, and a typical formulation would incorporate 90% by weight of citric acid.

The bleach (or acid) component may be presented as a liquid formulation, and delivered from container 6. A typical liquid bleach formulation would be

| | <u>% by Weight</u> |
|--------------------------|--------------------|
| Sodium hypochlorite | 4.5 |
| Sodium hydroxide | 0.8 |
| Myristyl amine oxide | 10.0 |
| Sodium Xylene Sulphonate | 0.75 |
| Water | Balance |

This would have a viscosity of about 3500 cps.

The material of the container 6 would be bleach resistant. A bleach resistant colourant or dye may be incorporated in the liquid bleach formulation so that a user can readily tell when the container is empty.

Other liquid bleach formulations are described in US-A-5 034 150, EP-A-233 666, EP-A-137 551, GB-A-1 466 560, for example.

An example of an acid formulation would be 10 % hydrochloric acid, Tallow Ammonium Chloride type 1.5%, Alcohol Ethoxylate (non-ionic) 1.5%, dye, perfume and balance water to give a viscosity of about 500 Cps. Where the bleach or acid component is formulated as a liquid, then the surfactant/perfume/dye component may be formulated as a solid, using formulations well known in the art for solid rim sticks, comprising surfactant, solubility control agent (hydrophobe), perfume, colourant, electrolyte filler, etc.

The embodiment of Figure 9 delivers two liquid compositions and is similar in construction to the liquid rim device seen in WO 00/42261 save that it delivers two liquid compositions, whilst maintaining them separate.

A support member 70 is shown with part of its rear wall 72 removed for clarity, and also the strap which is used to suspend the holder from the toilet bowl rim. A bottom wall 74 of the support member 70 is divided into two separate parts 74a, 74b, separated by a gap 76. A cylinder or collar 78 extends up

from each bottom wall portion 74a, 74b, an aperture being provided in each wall portion 74a, 74b, within the area bound by the cylinder 78.

A delivery plate 80 is clipped to the underside of the wall 74.

As seen in Figure 10, plate 80 has a spigot 82 positioned to project up through the respective aperture in the wall 74.

A central dividing wall 84 divides the upper surface 86 of plate 80 into separate halves. A series of grooves or channels 87 extend away from the spigots 82.

A liquid container 90, which is generally transparent or translucent, has two separate compartments 92, 94, divided by a wall 96. It will be appreciated that container 90 may be formed as two separate members which are bonded together, or otherwise shaped to facilitate manufacture.

An outlet opening or neck 98, 100 on each compartment 92, 94 fits snugly in a respective cylinder 78, the spigot 82 displacing a frangible seal as the container is pushed down into the support member 70.

Liquids from the compartments 92, 94 then flow down onto the respective surface portion 86a, 86b, of the delivery plate 80. Dividing wall 84 serves to keep the liquids separate as they migrate along the channels 87.

The device functions generally as described in WO 00/42261 save that different liquid compositions are delivered onto the different delivery surfaces 86a, 86b, and are kept separated by the wall 84, until they are washed into the toilet cistern. The liquid compositions may be formulated as described above in relation to the first embodiment. Also, it will be appreciated that the liquid delivery systems may be as described in the first embodiment, using a cup below the delivery surface and a capillary system to deliver liquid onto the delivery surface, which could be a textile layer.

In the embodiment of Figures 11 and 12, the support member itself forms a cage for holding small tablets or pellets of a solid bleach formulation.

The drawings show a liquid dispensing device 110 similar in construction to the device seen in WO 00/42261. A container 112 of translucent

polypropylene contains a liquid surfactant/dye/perfume mixture 113. Container 112 is held in a support member 114 which is clipped onto the rim of a toilet bowl by means of a flexible strap 116 which is integral with a rear wall 118 of the support member.

Container 112 has an outlet 120 which is temporarily closed by a cap 122. Cap 122 has a frangible seal 124 which, as seen in Figure 8, is displaced by a spigot 125 when the container 112 is inserted in the support member 110. The remaining portion of cap 122 serves to form a seal between the outlet 120 and a cylindrical collar 128.

Collar 128 defines an opening 130 in a bottom wall 132 of the support member 110. Liquid from container 112 flows through outlet 120 onto a delivery plate 134 which is clipped in place under wall 132. Spigot 125 projects up from plate 134. Grooves 136 extend away from the spigot 124 to duct liquid onto the exposed surface of plate 132, as described in the embodiment of Figures 9 and 10. Thus far, the arrangement is similar to that described in WO 00/42261.

The container 112 has sloping shoulders 138 to form a space 139 in the support member 114 which is bound by the shoulders 138, rear wall 118, front wall 140 and side walls 142.

Pellets 144 of a bleaching composition are housed in the space 139.

Vertically extending through holes or slots 146 are formed in the rear wall 118. These stop a few millimetres above the bottom wall 132. Slots 148 are formed in the front walls 140 and extend down to the bottom wall 132.

In use, flush water which impinges on plate 134 will also splash through the slots 146, into the space 139. This will wash over the tablets 144 to take some of the bleaching components into solution, and the resultant solution will drip out through the front slots 148.

Figures 13 to 15 show a modified tablet holder for the embodiment of Figures 1 to 8. This tablet holder is arranged to hold the flush water, which enters the holder, in contact with the tablet for a short period of time prior to releasing it into the toilet bowl. By having a noticeable residence period in the

tablet holder, the flush water will take components of the bleach block (or other block type in the holder) into solution in a more controlled manner. Also, by delaying the drainage of the formed solution into the toilet bowl, the constituents are less likely to be carried out of the bowl with the flushing water.

To achieve a residence time in the tablet holder we provide an outlet aperture of small size, arranged to allow water to drain from the tablet holder in about 5 to 15 seconds. It is desirable to arrange for the solution to drip into the toilet bowl while there is still some turbulence in the water in the bowl but after the flow of water out of the bowl has ended. To ensure that a sufficient quantity of water enters the tablet holder, the plate 12 is sloped downwards towards the entry aperture 59, 60, preferably at an angle of about 10 to 20 degrees to the horizontal, and preferably about 15 degrees, as seen in Figure 16. The horizontal may be taken as the perpendicular to the main strap portion 10a (Figures 1 and 2). It will be appreciated that the actual angle of the plate 12 to the horizontal will depend on the orientation adapted by the device when installed by the user on the toilet bowl rim 154 and this itself may also vary between bowl designs.

Figure 13 shows a perspective view of the tablet holder 8' from the rear side (i.e. the side of the delivery plate 12 when installed) cf. the view in Figure 6. Inlet aperture 60' aligns with the upper surface of the plate 12 or fabric layer 24 and aperture 59 in the rear wall of the holder 4 (see Figure 6). Aperture 60' is dimensioned to allow the tablet holder 8' to fill to about the level of the aperture 60' during a flushing cycle. Water filling the tablet holder 8' eventually drains from the tablet holder through outlet aperture 56' in the bottom wall 58. In this embodiment, the outlet aperture is about 1.3 mm across, typically starting to drain a few seconds after the flush has stopped, and continuing to drain for several minutes, preferably ten minutes or more after the flush. Outlet aperture 56' will be smaller than inlet aperture 60'. The quantity of water in tablet holder 8' will depend on the amount of tablet left, but a quantity in the region of 5 cm³ is preferred.

As with the embodiment of Figures 1 to 8, bottom wall 58 is dished, sloping down to the outlet aperture 56', and a tablet 8, is supported on radial ribs 61. A plurality of pins extend up from the bottom wall 58 and the tablet is located between the pins 150. This ensures that the tablet is held clear of the inlet and outlet apertures 60', 56, to avoid blocking them, and water can access the side and underneath of the tablet. Also, a shield plate 52 further protects the outlet aperture 56' to prevent tablet particles blocking the aperture.

Nibs 156 engage in recesses in the sidewalls of container 6 to clip the cage 8 to the container, to form a refill unit.

Typical formulations for a bleach tablet are given in table 1.

TABLE 1

Document #: 798665

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|-------------------------|------|------|------|-----|-----|----|-----|-----|------|------|------|------|
| Ufaryl DL90 | | | | | 20 | 20 | | | | | 15 | 20 |
| Ufaryl DL80P | 20 | 17.5 | 17.5 | 15 | | | 20 | 20 | 17.5 | 20 | | |
| Hostapur SAS 93G | 20 | 17.5 | 17.5 | 15 | 20 | 20 | 20 | 20 | 17.5 | 20 | 15 | 20 |
| S.D.I.C. | 45 | 55 | 60 | 65 | 45 | 50 | 50 | 50 | 55 | 45 | 45 | 40 |
| Calcium Sulphate s.f.w. | 10.3 | | | 1.5 | 5.5 | | | 5.5 | 5.5 | 10.3 | 21.3 | 15.3 |
| Plasthall 4141 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1.0 | 1 |
| Mineral Oil | 3.5 | 3 | 3 | 2.5 | 3.5 | 3 | 3.5 | 3.5 | 3.5 | 3.5 | 2.5 | 3.5 |
| Tytanpol R-002 | 0.2 | | | | - | | | | | 0.2 | 0.2 | 0.2 |
| Sodium Sulphate | | 6 | 1 | | 5 | 6 | 5.5 | | | | | |

| Material | Chemical Name |
|-------------------------|---|
| Unger Ufaryl DL90 | Sodium Alkylaryl Sulphanate (Sodium Dodecylbenzene Sulfonate) |
| Hostapur SAS 93G | Secondary alkane sulphonate, sodium salt (93%) |
| Ufaryl DL80P | Sodium Alkylaryl Sulphanate (Sodium Dodecylbenzene Sulfonate) |
| Sodium Sulphate | Sodium Sulphate |
| Mineral Oil | White mineral oil, or Paraffin Oil |
| Plasthall 4141 | Triethylene Glycol Caprate Caprylate |
| Calcium Sulphate s.f.w. | Gypsum, or Calcium Sulphate dihydrate |
| S.D.I.C. | Sodium Dichloroisocyanurate, dyhydrate |

Various modifications will be apparent to those skilled in the art and it is desired to include all such modifications as full within the scope of the accompanying claims.

CLAIMS

1. A liquid dispensing unit for a toilet bowl, comprising a first container containing a first, liquid formulation, a second container containing a second formulation, and delivery means for automatically delivering the formulations to the toilet bowl.
2. A liquid dispensing unit as claimed in claim 1, including a strap for suspending the unit from a rim of the toilet bowl.
3. A liquid dispensing unit as claimed in claim 1 or 2, wherein the first formulation comprises one or more of a surfactant, a dye and a perfume.
4. A liquid dispensing unit as claimed in claim 1, 2 or 3, wherein the second formulation is a solid.
5. A liquid dispensing unit as claimed in claim 4, wherein the second formulation contains a bleach.
6. A liquid dispensing unit as claimed in claim 5, wherein the second formulation contains an acidic component for limescale removal or inhibition.
7. A liquid dispensing unit as claimed in claim 1 or 2, wherein the second formulation is a liquid.
8. A liquid dispensing unit as claimed in claim 1, 2 or 7, wherein one formulation contains one or more of a surfactant, a dye and a perfume, and the other formulation contains a bleach, or an acidic component for limescale inhibition.

9. A liquid dispensing unit as claimed in any one of claims 1 to 8, wherein the or a liquid composition is delivered onto a delivery plate and, in use, flush water washes the composition from the plate into the toilet bowl.
10. A liquid dispensing unit as claimed in claim 9, wherein the or a liquid composition is delivered into a cup below the delivery plate, and ducted onto the upper surface of the plate by a capillary.
11. A liquid dispensing unit as claimed in claim 9 or 10, wherein the delivery plate includes a layer of textile material.
12. A refill for a liquid dispensing unit as claimed in any one of claims 1 to 5, comprising a liquid container containing a liquid composition, and a cage containing a solid composition, wherein the cage and the liquid container are clipped together to form a unit.
13. A liquid dispensing unit as claimed in claim 1, wherein the liquid formulation includes a bleach component.
14. A liquid dispensing unit as claimed in claim 4, wherein the second, solid formulation includes a colourant.
15. A liquid dispensing unit for a toilet bowl, comprising a first container containing a first, liquid formulation, a holder for holding the container, a strap for suspending the unit from a rim of a toilet bowl, and a delivery surface, liquid from the container flowing onto the delivery surface and the delivery surface being positioned in use, to be washed with flush water of the toilet bowl to wash the liquid from the delivery surface into the toilet bowl, wherein a second liquid formulation is provided and means is provided for releasing the second formulation into the toilet bowl.

16. A liquid dispensing unit for a toilet bowl, comprising a first container containing a first, liquid formulation, a holder for holding the container, a strap for suspending the unit from a rim of a toilet bowl and a delivery surface, liquid from the container flowing onto the delivery surface and the delivery surface being positioned in use, to be washed with flush water of the toilet bowl to wash the liquid from the delivery surface into the toilet bowl, wherein a second, solid formulation is provided and means is provided for causing flush water to wash over the second formulation.

17. A liquid dispensing unit as claimed in claim 15 or 16, wherein the first and second formulations are kept separate until they have entered the flush water held in the toilet bowl.

18. A refill for a liquid dispensing unit which, in use, is suspended from a rim of a toilet bowl, the refill comprising a first container containing a liquid product, and a second container containing a solid product.

19. A refill as claimed in claim 18, wherein the first and second containers are separately formed.



20. A refill as claimed in claim 19, wherein the first and second containers clip together to form a unit.

21. A container for containing a tablet of material for delivery into a toilet bowl, the container having an inlet in a side wall for flush water to flow into the container to approximately the level of the inlet, a base below the inlet level with an outlet aperture for the water, the base in use supporting a said tablet, whereby water collects in the container to solubilise components of the tablet and drips from the container outlet over a period of time.

22. A container as claimed in claim 21, wherein a plurality of positioning members are provided in the container to locate the tablet clear of the inlet and outlet apertures.

23. A container as claimed in claim 21 or 22, wherein a plate is provided adjacent the inlet aperture, the plate, in use, extending below the rim of a toilet bowl to collect flush water and direct it towards the inlet aperture.

24. A container as claimed in claim 23, including a strap for suspending the container and plate from the rim of a toilet bowl, the plate being angled to slope downwardly towards the aperture, in use.

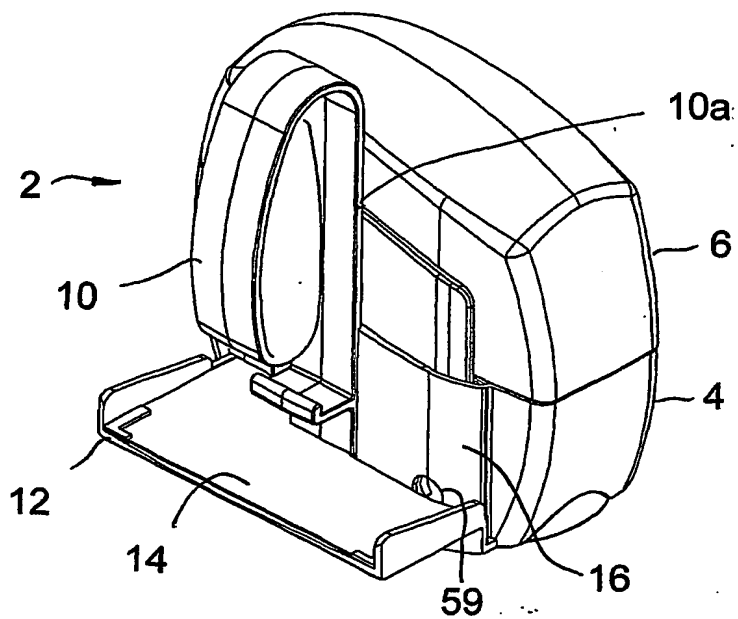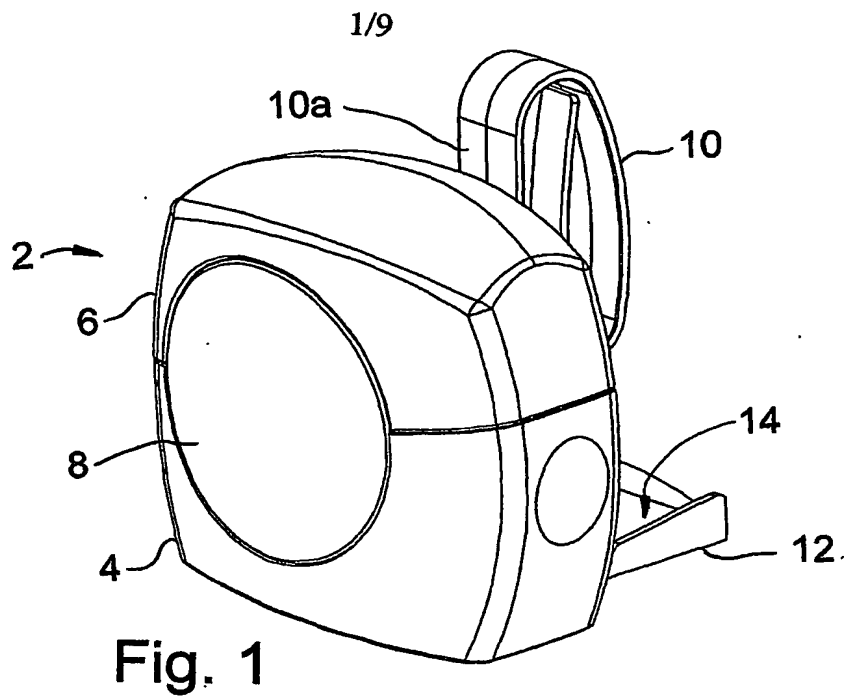

2/9

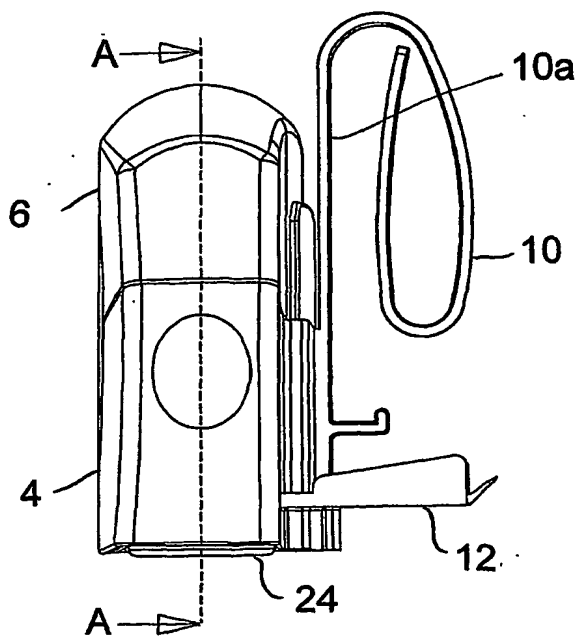


Fig. 3

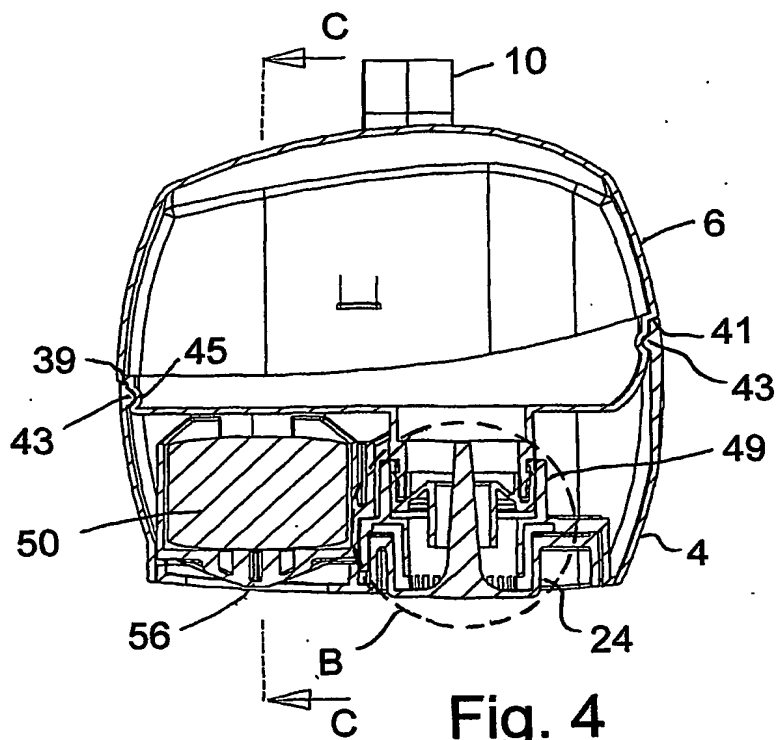


Fig. 4

3/9

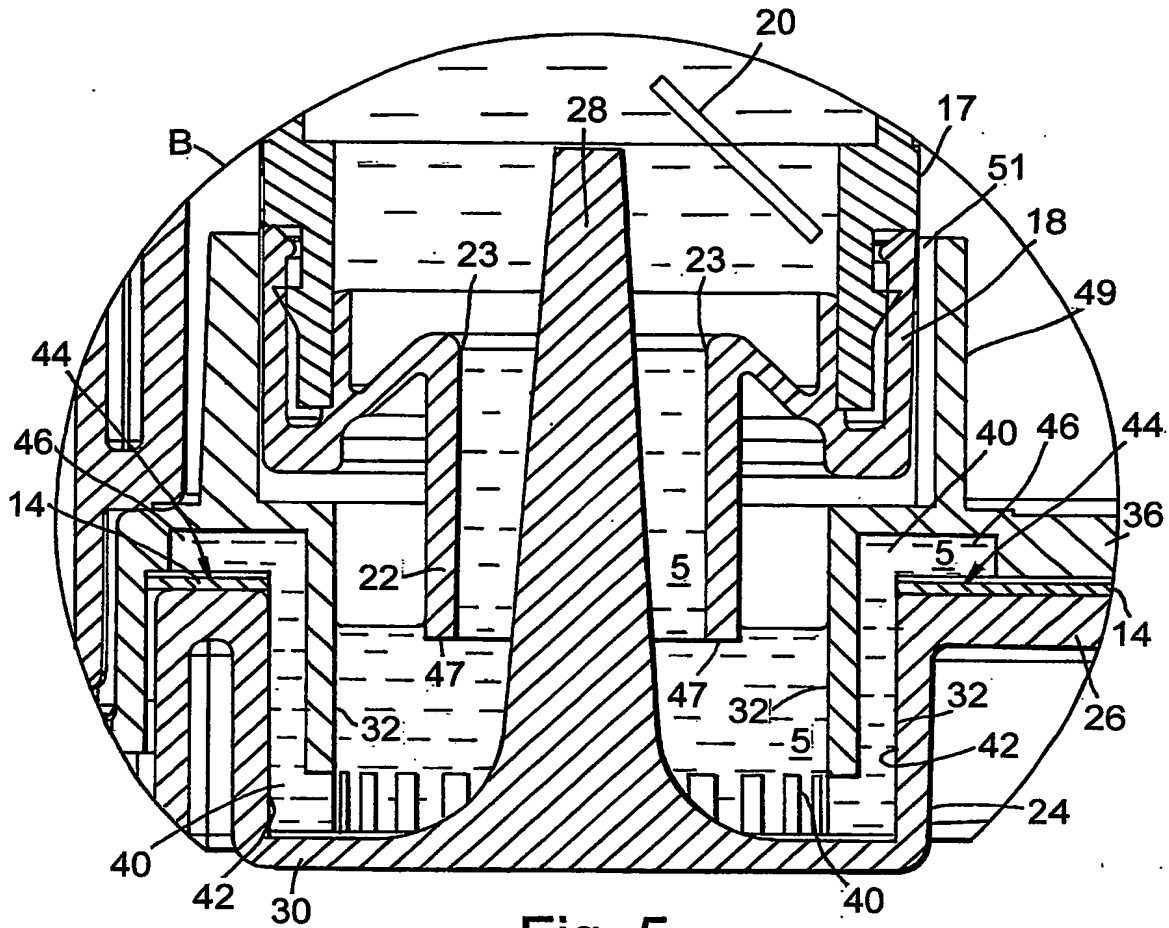


Fig. 5

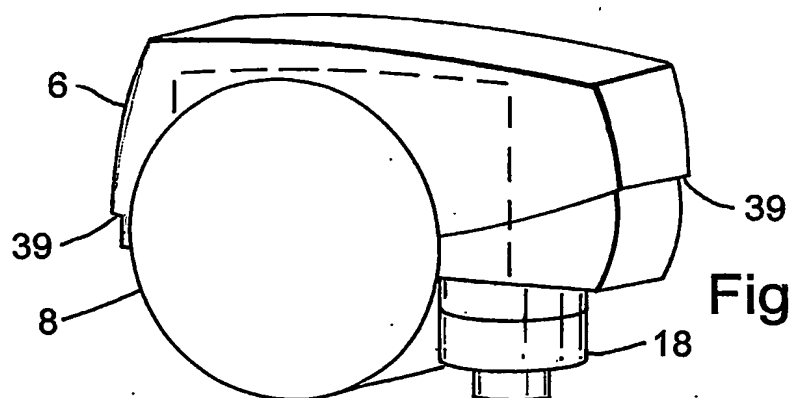


Fig. 8

4/9

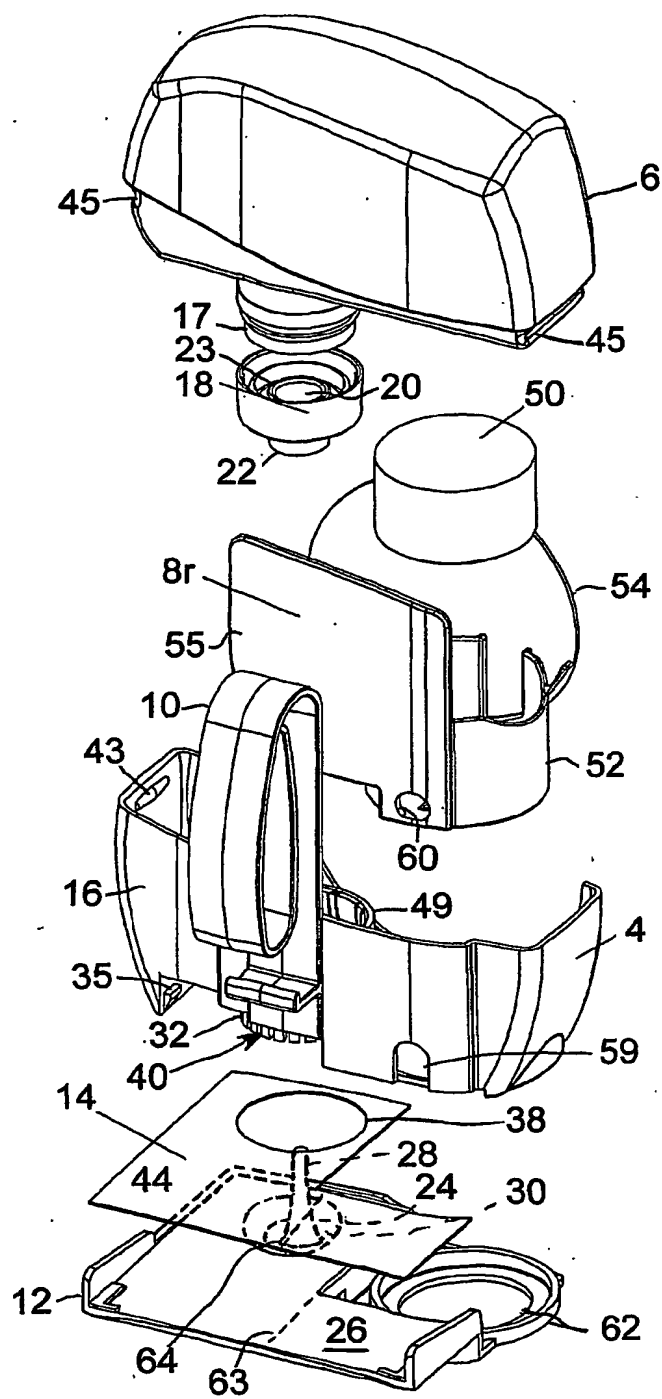


Fig. 6

SUBSTITUTE SHEET (RULE 26)

5/9

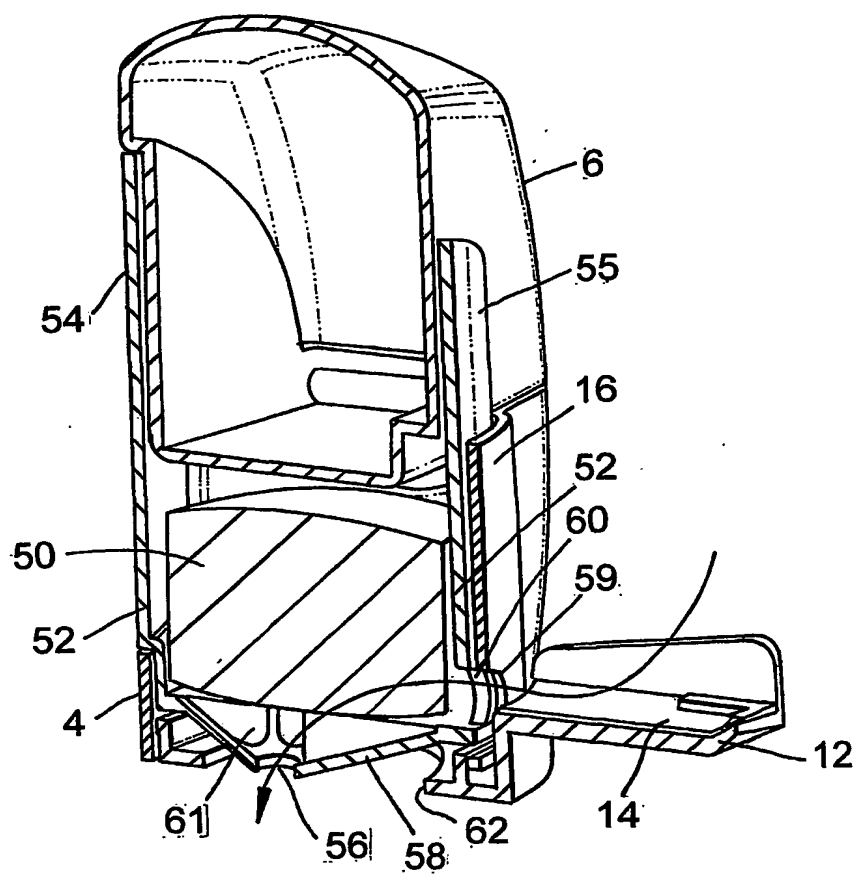
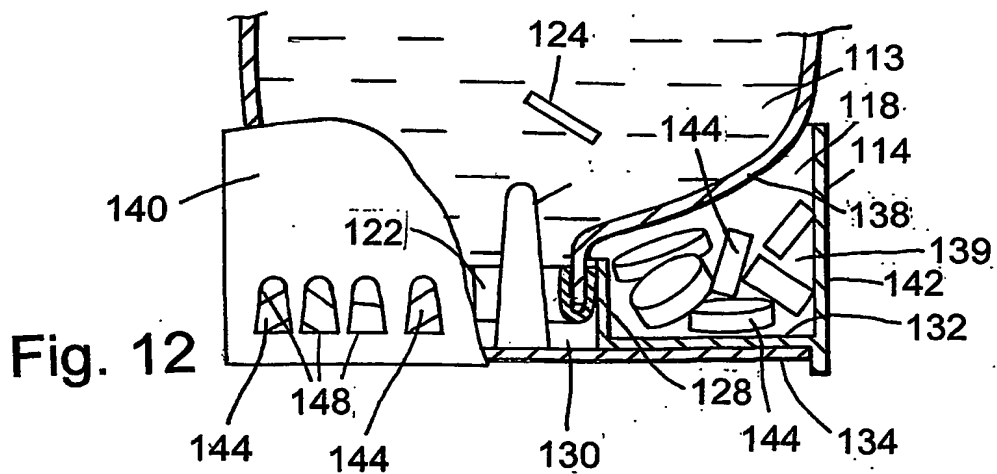
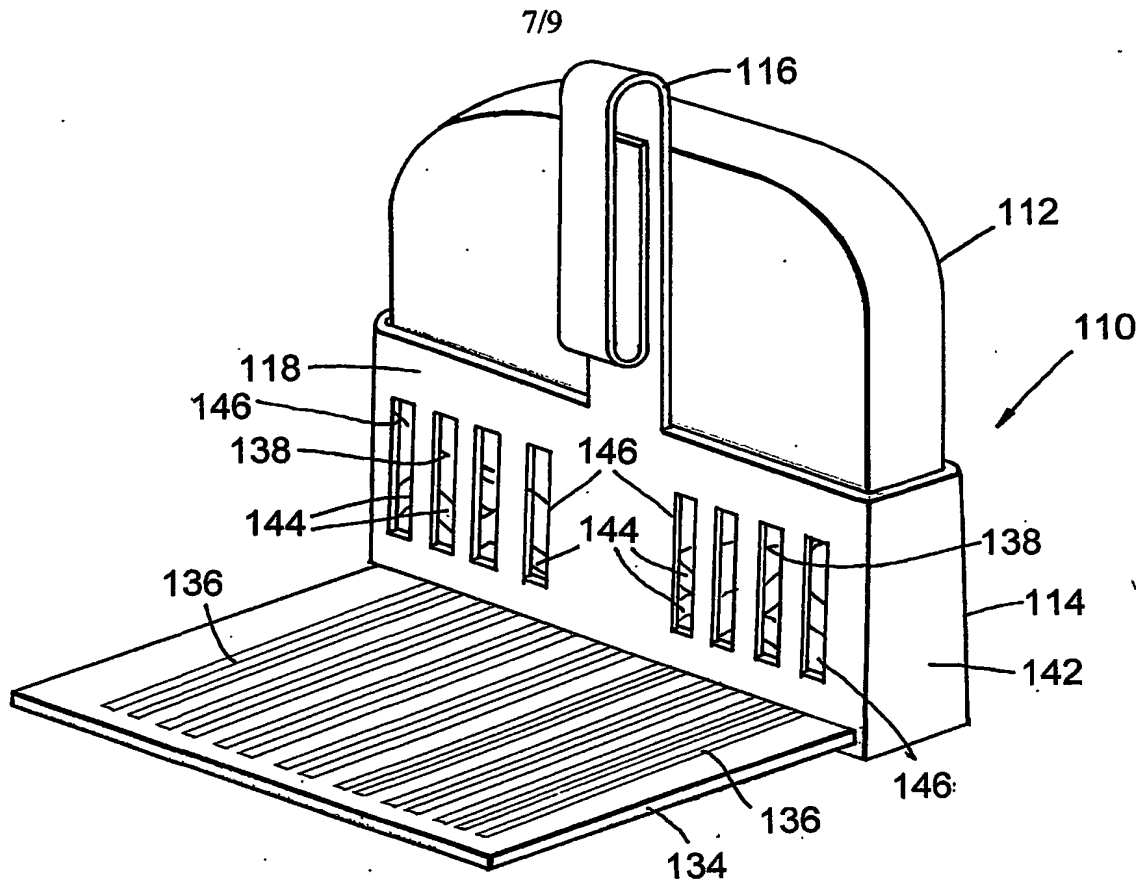
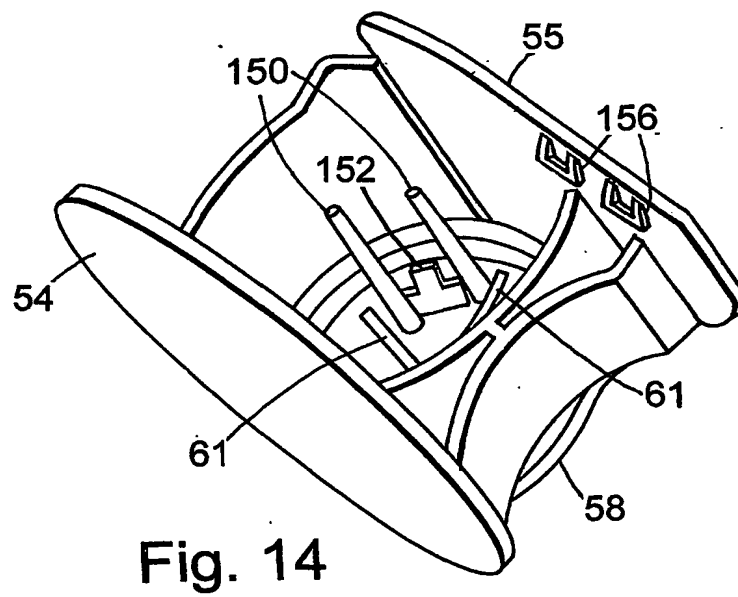
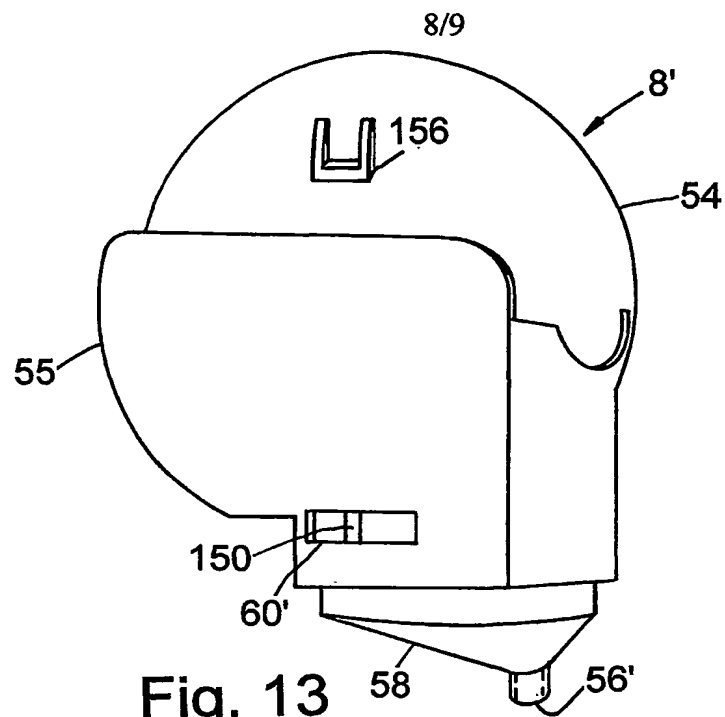


Fig. 7





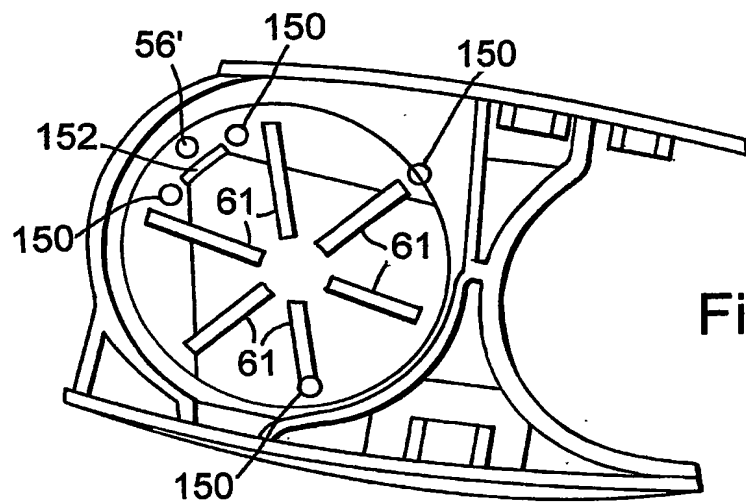


Fig. 15

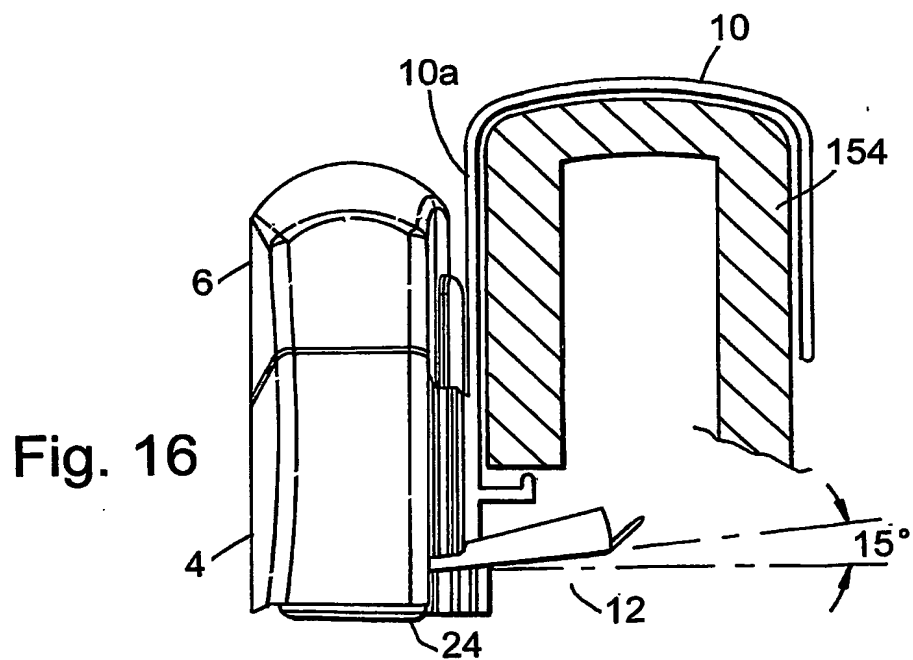


Fig. 16

INTERNATIONAL SEARCH REPORT

International Api
PCT/GB 02/00599

| A. CLASSIFICATION OF SUBJECT MATTER IPC 7 E03D9/03 | | |
|---|--|--|
| According to International Patent Classification (IPC) or to both national classification and IPC | | |
| B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 E03D | | |
| Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched | | |
| Electronic data base consulted during the International search (name of data base and, where practical, search terms used) EPO-Internal | | |
| C. DOCUMENTS CONSIDERED TO BE RELEVANT | | |
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| X | EP 0 960 984 A (BUCK CHEM TECH WERKE) 1 December 1999 (1999-12-01) paragraph '0012! - paragraph '0013! paragraph '0019! paragraph '0015! figure 1 | 1-5,8,9, 15-17 |
| X A | DE 37 38 554 A (LIESK INGRID) 24 May 1989 (1989-05-24) column 1, line 65 -column 2, line 49 figures 1-4 -/- | 1-3,7, 15,17 9 |
| <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. | | |
| * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family | | |
| Date of the actual completion of the international search 26 April 2002 | | Date of mailing of the international search report 07/05/2002 |
| Name and mailing address of the ISA European Patent Office, P.O. 8016 Patentaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 851 epo nl, Fax: (+31-70) 340-3018 | | Authorized officer Urbahn, S |

INTERNATIONAL SEARCH REPORT

International App.

PCT/GB 02/00599

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|---------------------------------|
| X A | GB 2 349 157 A (UNILEVER PLC) 25 October 2000 (2000-10-25) page 3, line 21 -page 4, line 5 page 5, line 24 -page 6, line 11 figures | 1-3,7,8 5,6,13, 14,17 |
| A | EP 0 785 315 A (LEE DE NV SARA) 23 July 1997 (1997-07-23) | |
| X | US 4 168 551 A (HAUTMANN HORST ET AL) 25 September 1979 (1979-09-25) column 4, line 66 -column 5, line 36 figure 6 | 21-24 |
| X | US 3 766 576 A (ANCEL S) 23 October 1973 (1973-10-23) column 2, line 53 -column 3, line 53 figures 1,2 | 21,23,24 |
| P,X | EP 1 087 067 A (BUCK CHEMIE GMBH) 28 March 2001 (2001-03-28) paragraph '0024! figures 11-13 | 1-5,7-9, 15,16 |

INTERNATIONAL SEARCH REPORT

International
PCT/GB 02/00599

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-20

Rim block with two containers for two different active formulations

2. Claims: 21-24

Rim block for a solid active formulation

INTERNATIONAL SEARCH REPORT

International Appl

PCT/GB 02/00599

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|---|--|
| EP 0960984 | A | 01-12-1999 | DE 19823338 A1 EP 0960984 A2 | 09-12-1999 01-12-1999 |
| DE 3738554 | A | 24-05-1989 | DE 3738554 A1 AU 2785889 A DE 3906224 A1 WO 8904403 A1 EP 0343208 A1 JP 2502205 T | 24-05-1989 01-06-1989 30-08-1990 18-05-1989 29-11-1989 19-07-1990 |
| GB 2349157 | A | 25-10-2000 | AU 3967300 A WO 0065162 A1 | 10-11-2000 02-11-2000 |
| EP 0785315 | A | 23-07-1997 | NL 1001722 C2 AT 194186 T AU 711453 B2 AU 7400796 A DE 69609046 D1 DE 69609046 T2 DE 785315 T1 EP 0785315 A1 ES 2142777 T1 NZ 299791 A PT 785315 T SG 47196 A1 ZA 9609755 A | 23-06-1997 15-07-2000 14-10-1999 29-05-1997 03-08-2000 26-10-2000 20-05-1999 23-07-1997 01-05-2000 26-08-1998 31-10-2000 20-03-1998 23-06-1997 |
| US 4168551 | A | 25-09-1979 | US RE32017 E | 05-11-1985 |
| US 3766576 | A | 23-10-1973 | NONE | |
| EP 1087067 | A | 28-03-2001 | DE 19945598 A1 EP 1087067 A1 | 19-04-2001 28-03-2001 |